

Visual-P2.5

640×480Indoor

Die-casting Aluminum LED Display Unit.

Main Technical Specifications:

	Parameter Name	Product Parameter
Module	Pixel Pitch	2.5mm
	LED Type	SMD2121
	Module Resolution （W×H）	128*64 Pixels
	Module Dimension	320mm×160mm
Cabinet	Cabinet Resolution (W×H)	256*192 Pixels
	Cabinet Dimension With Back Cover(WxHxD)	640mm*480mm*65mm
	Cabinet Weight (kg/panel)	7.8 kg
	Maintenance	Full front maintenance
	Ingress Protection	IP30
	Cabinet Material	Die-casting Aluminum
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	600 CD/m^2
	Standard Color Temperature	6500K (1000K～9500K Adjust a ble)
	Beam Angle （Hor/Ver°）	140°/140°
	Contrast Ratio	3000 : 1


Electron ic	Input Power <Max>	488W/m^2
	Input Power <Typical>	163W/m^2
	Power Supply Input Voltage	AC200-240V，Frequency 47-63(Hz)
Performan ce	Frame ChangingFrequency	60Hz
	Drive Mode	Constant Current Drive/32Scan
	Processing Depth	12~14 Bit
	Refresh Rate	3840Hz
	Video Support	2K HD, 4K UHD
Environme nt	Life Typical Value (Hrs)	100,000H
	Working Temperature/ Humidity Range (℃/RH)	-20℃~45℃/10%~60% RH (No Condensation)
	Storage Temperature / Humidity Range (℃/RH)	-10℃~50℃/ 10%~65%RH (No Condensation)

Note:

1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

2.The specification parameters are referencevalues. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.

Cabinet Drawing:

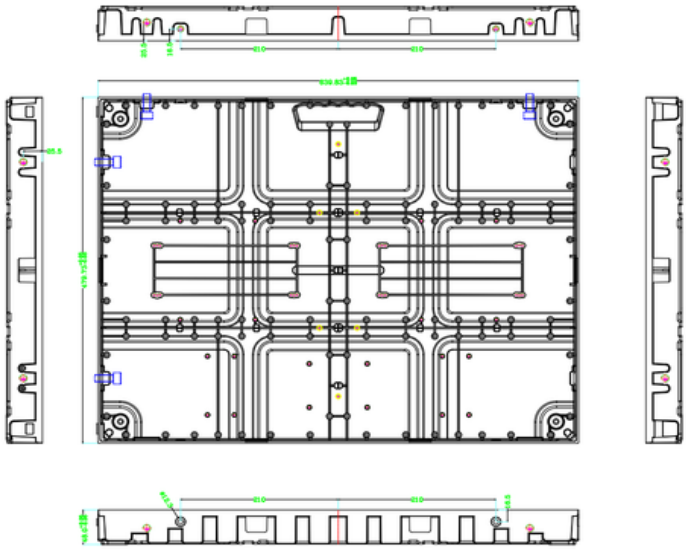

Note: Drawings are for reference only.

Contact Person: Ahmed Nabhan
Contact: 0543757900